

JL7083F Datasheet

Zhuhai Jieli Technology Co.,LTD

Version 1.4

Date 2025.06.13

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

Revision History

Date	Revision	Description
2024.04.03	V1.0	Initial Release
2024.07.18	V1.1	Update DSP Audio Processing_Features(Support Hi-Res Audio) Update BT Characteristics Update IC Marking Information
2024.09.12	V1.2	Update Features_Peripherals
2025.01.07	V1.3	Update Features_Bluetooth Update Block Diagram Update BT Characteristics
2025.06.13	V1.4	Update Datasheet Format Update Features_SYSTEM Update Package Information

Table of Contents

Revision History	1
Table of Contents	2
JL7083F Features	3
1 Block Diagram	5
2 Pin Definition	6
2.1 Pin Assignment	6
2.2 Pin Description	7
3 Electrical Characteristics	10
3.1 Absolute Maximum Ratings	10
3.2 ESD Ratings	10
3.3 PMU Characteristics	10
3.4 Battery Charge	11
3.5 IO Characteristics	11
3.6 Audio DAC Characteristics	13
3.7 Audio ADC Characteristics	15
3.8 BT Characteristics	16
4 Package Information	17
4.1 QFN52_6×6mm	17
5 IC Marking Information	18
6 Solder-Reflow Condition	19

JL7083F Features

SYSTEM

- Dual Core 32bit DSP 192MHz
- With IEEE754 Single precision FPU
- Support FFT/MATRIX/MATH
- Support NPU
- 2 x I-cache and D-cache
- Support SDTAP/EMU
- On-chip SRAM 384kbyte
- Support MMU
- Support MPU
- Built-In Flash
- 24MHz crystal oscillator
- Internal RC oscillator, PLL

DSP Audio Processing

- SBC/AAC/LDAC/LHDC/LC3/CVSD/mSBC codec
- CVSD/mSBC voice codec for BT phone
- PLC for voice processing
- Single/Multi MIC ENC
- Multi-band DRC
- Multi-band EQ
- Support spatial sound
- Support assistive listening
- Support Hi-Res Audio

ANC

- Wide band digital adaptive ANC
- Support hybrid/feedforward/feedback
- Support wind noise detection
- Support wide area tap
- Support Speak-to-Chat
- Support tip fit test & wear detection
- Input-to-output latency < 8us

Audio

- 2 x 24bit DAC
 - ❖ SNR 119dB
 - ❖ Noise 1uVrms
 - ❖ Supports differential mode
 - ❖ Sampling rate 8~192kHz
- 5 x 24bit ADC

- ❖ SNR 106dB
- ❖ Sampling rate 8~192kHz
- ❖ Support ultra-low power mode
- I²S/TDM/PDM AUDIO Master/Slave interface

Bluetooth

- Dual-mode BT6.0 with LE Audio (DN Q332415)
- Support AoA/AoD
- Support LE audio BIS/CIS
- Support long range BLE
- Maximum transmitting power 13dBm
- Receiver sensitivity
 - ❖ -98dBm @BR
 - ❖ -98.5dBm @EDR $\pi/4$ DQPSK
 - ❖ -92.5dBm @EDR 8DPSK

Peripherals

- 1 x Full speed USB
- 1 x SD host controller
- 6 x Multi-function 32bit timer
- 3 x UART interface
- 1 x I²C Master/Slave interface
- 3 x SPI Master/Slave interface
- 1 x QDEC
- 4 x MCPWM
- 2 x Light strip controller
- 1 x 10bit ADC(14 Channels)
- 28 x GPIO Support function remapping
- 5 x LP_Touch with low power wake up

PMU

- Integrated battery charger up to 220mA
- 2 x Buck DC-DC converter
- Support temperature sensor
- VPWR range 4.5V to 5.5V
- VBAT range 2.7V to 4.5V
- IOVDD range 2.7V to 3.6V

Packages

- QFN52(6mm*6mm)

Temperature

- Operating temperature
TC = -20℃ to +85℃(standard range)
TC = -40℃ to +105℃(extended range)
- Storage temperature -65℃ to +150℃

Applications

- Adaptive ANC headphone
- Bluetooth audio device

1 Block Diagram

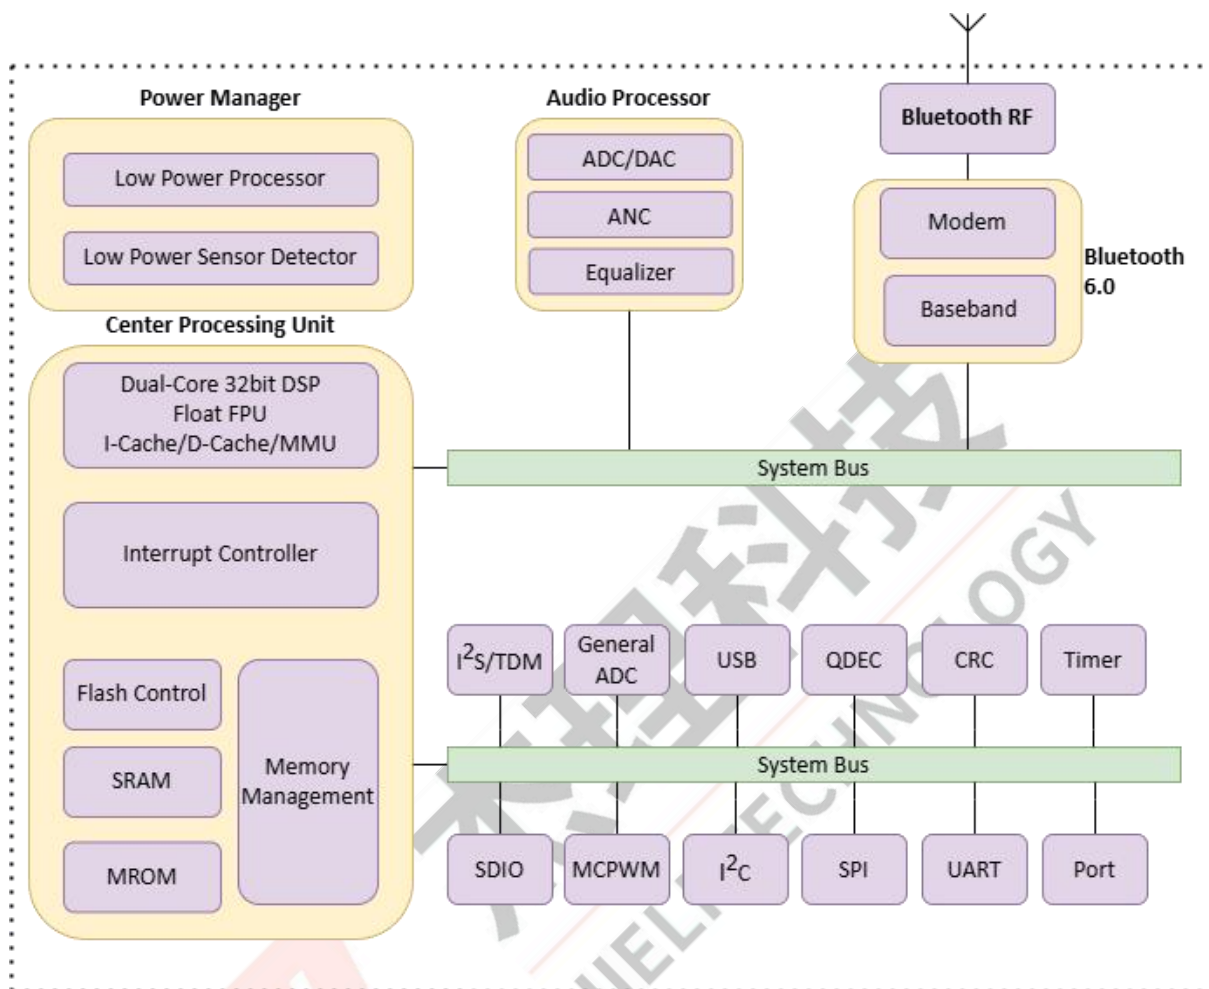


Figure 1-1 JL7083F Block Diagram

2 Pin Definition

2.1 Pin Assignment

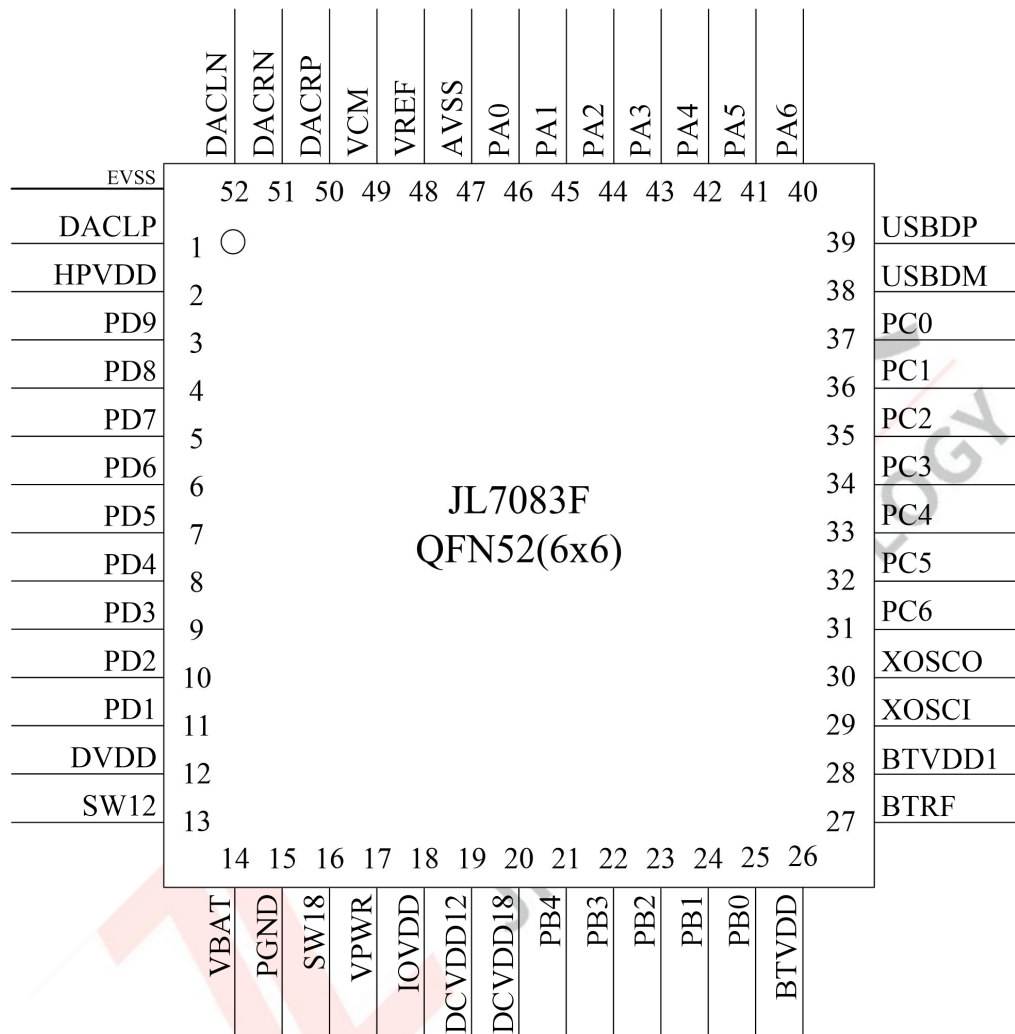


Figure 2-1 JL7083F Pin Assignment

2.2 Pin Description

Table 2-2-1 JL7083F Pin Description

Pin No.	Name	Type	IO Initial State	Description
1	DACL	O	--	Left Channel DAC Positive Output
2	HPVDD	P	--	Audio Power
3	PD9	I/O	Z	ADC13(ADC Input Channel 13) MICLDO(MIC Bias LDO Output) MICBIASC(MIC Bias Output)
4	PD8	I/O	Z	AIN_CN0(Audio ADC Negative Input) LPAIN_N2(Low Power ADC Negative Input)
5	PD7	I/O	Z	AIN_CP0(Audio ADC Positive Input) LPAIN_P2(Low Power ADC Positive Input)
6	PD6	I/O	Z	AIN_DN0(Audio ADC Negative Input)
7	PD5	I/O	Z	AIN_DP0(Audio ADC Positive Input)
8	PD4	I/O	Z	AIN_EN0(Audio ADC Negative Input)
9	PD3	I/O	Z	AIN_EP0(Audio ADC Positive Input)
10	PD2	I/O	Z	AIN_EN1(Audio ADC Negative Input) MICBIASD(MIC Bias Output)
11	PD1	I/O	Z	AIN_EP1(Audio ADC Positive Input) MICBIASE(MIC Bias Output))
12	DVDD	P	--	Digital Power
13	SW12	P	--	1.2V Buck DCDC Switch Port
14	VBAT	P	--	Battery Input
15	PGND	G	--	Ground of Buck DC-DC converter
16	SW18	P	--	1.8V Buck DCDC Switch Port
17	VPWR	P	Z	Charge Power Input
18	IOVDD	P	--	3.0V Power
19	DCVDD12	P	--	1.2V Power
20	DCVDD18	P	--	1.8V Power
21	PB4	I/O	Z	ADC5(ADC Input Channel 5) LP_TOUCH4(TOUCH_CH4)
22	PB3	I/O	Z	ADC4(ADC Input Channel 4) LP_TOUCH3(TOUCH_CH3)
23	PB2	I/O	Z	ADC3(ADC Input Channel 3) LP_TOUCH2(TOUCH_CH2)
24	PB1	I/O	10kΩ Pull-up	ADC2(ADC Input Channel 2) LP_TOUCH1(TOUCH_CH1) Hold down 0 to reset

Pin No.	Name	Type	IO Initial State	Description
25	PB0	I/O	Z	ADC1(ADC Input Channel 1) LP_TOUCH0(TOUCH_CH0) LVD(External Low Voltage Detection Input)
26	BTVDD	P	--	BT Power
27	BTRF	RF	--	Bluetooth RF Antenna
28	BTVDD1	P	--	BT Power
29	XOSCI	I	--	Crystal Oscillator Input
30	XOSCO	O	--	Crystal Oscillator Output
31	PC6	I/O	Z	--
32	PC5	I/O	Z	ADC10(ADC Input Channel 10)
33	PC4	I/O	Z	ADC9(ADC Input Channel 9)
34	PC3	I/O	Z	ADC8(ADC Input Channel 8)
35	PC2	I/O	Z	ADC7(ADC Input Channel 7)
36	PC1	I/O	Z	ADC6(ADC Input Channel 6)
37	PC0	I/O	Z	--
38	USBDM	I/O	15kΩ Pull-down	USB Negative Data ADC15(ADC Input Channel 15)
39	USBDP	I/O	15kΩ Pull-down	USB Positive Data ADC14(ADC Input Channel 14)
40	PA6	I/O	Z	AIN_AN0(Audio ADC Negative Input) LPAIN_N1(Low Power ADC Negative Input)
41	PA5	I/O	Z	AIN_AP0(Audio ADC Positive Input) LPAIN_P1(Low Power ADC Positive Input)
42	PA4	I/O	Z	MICBIASA(MIC Bias Output) LPAIN_N0(Low Power ADC Negative Input) AIN_BN1(Audio ADC Negative Input) AIN_AN1(Audio ADC Negative Input)
43	PA3	I/O	Z	MICBIASB(MIC Bias Output) LPAIN_P0(Low Power ADC Positive Input) AIN_BP1(Audio ADC Positive Input) AIN_AP1(Audio ADC Positive Input)
44	PA2	I/O	Z	AIN_BN0(ADC Negative Input) AIN_DN1(ADC Negative Input)
45	PA1	I/O	Z	AIN_BP0(Audio ADC Positive Input) AIN_DP1(Audio ADC Positive Input)
46	PA0	I/O	Z	LPMICBIASA(MIC Bias Output)
47	AVSS	G	--	Audio Ground
48	VREF	P	--	Audio Power
49	VCM	P	--	Audio reference voltage
50	DACRP	O	--	Right Channel DAC Positive Output
51	DACRN	O	--	Right Channel DAC Negative Output

Pin No.	Name	Type	IO Initial State	Description
52	DACLN	O	--	Left Channel DAC Negative Output

Note

1. IO initial state abbreviations Z--High resistance, H--High level, L--Low level, X--May be changed during power on.
2. Timer, MCPWM, QDEC, UART, LEDC, I²C, I²S, SPI and SD functions can be remapped to any I/O.

Table 2-2-2 Pin types description

Pin Type	Description	Pin Type	Description
P	Power	I/O	Input or Output
G	Ground	I	Input
RF	RF antenna	O	Output

3 Electrical Characteristics

3.1 Absolute Maximum Ratings

Table 3-1 Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Unit
Topt	Operating temperature	-20	+85	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	-0.3	4.5	V
VPWR		-0.3	6.0	V
IOVDD		-0.3	3.6	V
DCVDD12		-0.3	1.3	V
DCVDD18		-0.3	2.0	V
BTVDD		-0.3	2.0	V
BTVDD1		-0.3	1.3	V
VREF		-0.3	1.0	V
HPVDD		-0.3	2.0	V
GPIO	Input voltage of GPIO (except PC0/PC6)	-0.3	3.6	V
HVTIO	Input voltage of HVT-IO (PC0/PC6)	-0.3	5.5	V

Note

1. Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.

3.2 ESD Ratings

Table 3-2 ESD Ratings

Parameter	Typ	Test pin	Reference standard
Human Body Mode	±4kV	All pins	JEDEC EIA/JESD22-A114
Machine Mode	±200V	All pins	JEDEC EIA/JESD22-A115
Charge Device Model	±1kV	All pins	ANSI/ESDA/JEDEC JS-002-2022

3.3 PMU Characteristics

Table 3-3 PMU Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
VBAT	Power supply	--	2.7	3.7	4.5	V
VPWR	Power supply	--	4.5	5.0	5.5	V
Operating mode						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IOVDD	Voltage output	--	--	3.0	--	V
	Loading current	IOVDD=3.0V@VBAT = 3.7V	--	--	200	mA
DCVDD12	Voltage output	--	--	1.2	--	V
	Loading current	DCVDD12=1.2V@VBAT = 3.7V	--	--	150	mA

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
DCVDD18	Voltage output	--	--	1.8	--	V
	Loading current	DCVDD18=1.8V@VBAT = 3.7V	--	--	180	mA
Low Power mode						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IOVDD	Loading current	IOVDD=3.0V@VBAT = 3.7V	--	--	20	mA

3.4 Battery Charge

Table 3-4 Charger Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
VPWR	Charge Input Voltage	VBAT+0.1V	5.0	5.5	V
CV	CV Mode Voltage Accuracy	4.175	4.2	4.225	V
		4.325	4.35	4.375	V
CC	CC Mode Current	20	--	220	mA
I _{end}	End Of Charge Current	2	--	22	mA
V _{Trickl}	Trickle Charge Voltage	--	3.0	--	V

3.5 IO Characteristics

Table 3-5 IO Characteristics

Input Characteristics						
Symbol	Parameter	Conditions	IO	Min	Max	Unit
V _{IL}	Low-Level Input Voltage	IOVDD = 3.0V	PA0~PA6 PB0~PB4 PC0~PC6 PD1~PD9 USBDP USBDM VPWR	-0.3	1.4	V
V _{IH}	High-Level Input Voltage	IOVDD = 3.0V	PA0~PA6 PB0~PB4 PC1~PC5 PD1~PD9 USBDP USBDM	1.7	3.3	V
		IOVDD = 3.0V	PC0 PC6 VPWR	1.7	5.5	V
Output Characteristics						
Symbol	Parameter	Conditions	IO	Typ		Unit

I _{OL}	Output Current	IOVDD = 3.0V Voutput = 0.3V	PA0~PA6 PB0~PB4 PC1~PC5 PD1~PD9	2(HD=0) 8(HD=1) 26(HD=2) 50(HD=3)	mA	
		IOVDD = 3.0V Voutput = 0.3V	PC0 PC6 USBDP USBDM	8	mA	
		IOVDD = 3.0V Voutput = 0.3V	VPWR	2	mA	
I _{OH}	Output Current	IOVDD = 3.0V Voutput = 2.7V	PA0~PA6 PB0~PB4 PC1~PC5 PD1~PD9	2(HD=0) 8(HD=1) 26(HD=2) 50(HD=3)	mA	
		IOVDD = 3.0V Voutput = 2.7V	PC0 PC6 USBDP USBDM	8	mA	
		IOVDD = 3.0V Voutput = 2.7V	VPWR	2	mA	
Internal Resistance Characteristics						
Symbol	Parameter	Conditions	IO	Typ	Unit	
R _{pu}	Pull-up Resistance	IOVDD = 3.0V	PA0~PA6 PB0~PB4 PC0~PC6 PD1~PD9 VPWR	10k(PU=1) 100k(PU=2) 1M(PU=3)	Ω	
			IOVDD = 3.0V	USBDP	1.5k	Ω
			IOVDD = 3.0V	USBDM	180k	Ω
R _{pd}	Pull-down Resistance	IOVDD = 3.0V	PA0~PA6 PB0~PB4 PC0~PC6 PD1~PD9 VPWR	10k(PD=1) 100k(PD=2) 1M(PD=3)	Ω	
			IOVDD = 3.0V	USBDP USBDM	15k	Ω

Note

1.Internal pull-up/pull-down resistance accuracy ±20%

3.6 Audio DAC Characteristics

Table 3-6-1 Stereo DAC Characteristics under HPVDD 1.8V

Parameter	Conditions	Min	Typ	Max	Unit
Resolution	--	--	24	--	bits
Output Sample Rate	--	8	--	192	kHz
SNR ^①	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	119	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	109	--	dB
THD+N	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=32Ω	--	-87	--	dB
Noise Floor	Differential Mode B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	2.6	--	uVrms
Noise Floor with MUTE	Differential Mode B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	1	--	uVrms
Stereo Crosstalk	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	-130	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=16Ω THD+N<0.1%	--	30	50	mW

Note

1. ^①SNR is the ratio of output level with a 1kHz full-scale input to output level with MUTE on.

Table 3-6-2 Stereo DAC Characteristics under HPVDD 1.2V

Parameter	Conditions	Min	Typ	Max	Unit
Resolution	--	--	24	--	bits
Output Sample Rate	--	8	--	192	kHz
SNR ^①	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	117	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	107	--	dB
THD+N	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=32Ω	--	-83	--	dB
Noise Floor	Differential Mode B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	2.6	--	uVrms
Noise Floor with MUTE	Differential Mode B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	1	--	uVrms
Stereo Crosstalk	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=10kΩ	--	-130	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted Load=16Ω THD+N<0.1%	--	20	TBC	mW

Note

1. ^①SNR is the ratio of output level with a 1kHz full-scale input to output level with MUTE on.

3.7 Audio ADC Characteristics

Table 3-7 Audio ADC Characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Resolution	--	--	24	--	bits
Input Sample Rate	--	8	--	192	kHz
SNR	Differential input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	106	--	dB
	Single-ended input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	104	--	dB
Dynamic Range	Differential input Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	106	--	dB
	Single-ended input Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	104	--	dB
THD+N	Differential input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	-90	--	dB
	Single-ended input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	-90	--	dB
Analogue Gain		-6	--	21	dB
Max Input Level	Differential input Mode ADC gain=0dB	--	1	--	Vrms
	Single-ended input Mode ADC gain=0dB	--	0.5	--	Vrms

3.8 BT Characteristics

3.8.1 Transmitter

Table 3-8-1-1 Transmitter characteristics under BTVDD 1.8V

Parameter	Conditions	Min	Typ	Max	Unit
Maximum RF Transmit Power	BR	--	10	13	dBm
Maximum RF Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	10	--	dBm
Relative Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	-3	--	dB
Maximum RF Transmit Power	BLE-1Mbps	--	10	13	dBm
Maximum RF Transmit Power	BLE-2Mbps	--	10	13	dBm

Table 3-8-1-2 Transmitter characteristics under BTVDD 1.2V

Parameter	Conditions	Min	Typ	Max	Unit
Maximum RF Transmit Power	BR	--	8	10	dBm
Maximum RF Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	8	--	dBm
Relative Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	-3	--	dB
Maximum RF Transmit Power	BLE-1Mbps	--	8	10	dBm
Maximum RF Transmit Power	BLE-2Mbps	--	8	10	dBm

3.8.2 Receiver

Table 3-8-2 Receiver characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Sensitivity	BR	--	-98	--	dBm
	EDR $\pi/4$ DQPSK	--	-98.5	--	dBm
	EDR 8DPSK	--	-92.5	--	dBm
	BLE-1Mbps	--	-101	--	dBm
	BLE-2Mbps	--	-97.5	--	dBm
	BLE-S2	--	-104	--	dBm
	BLE-S8	--	-109	--	dBm

4 Package Information

4.1 QFN52_6×6mm

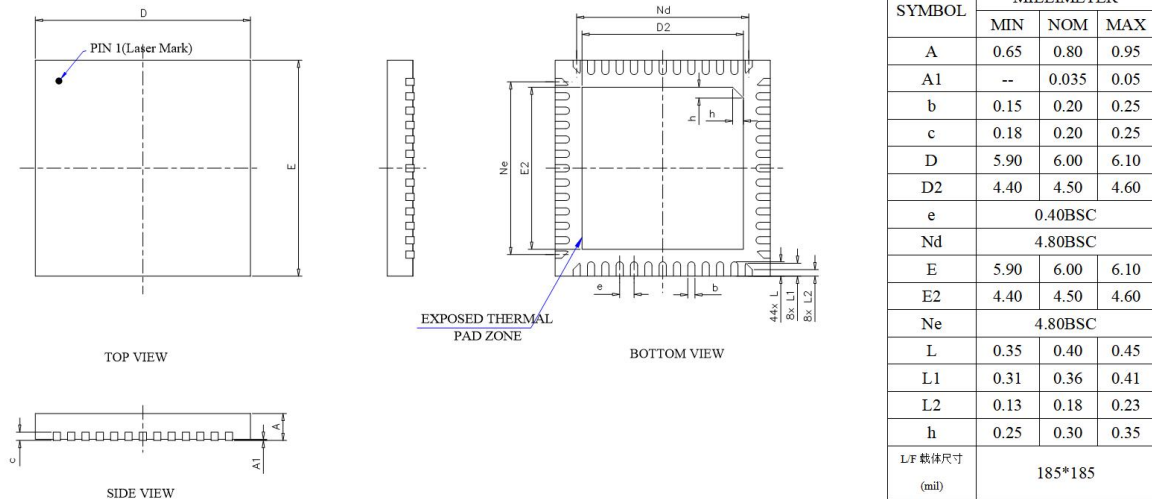


Figure 4-1 JL7083F Package

5 IC Marking Information

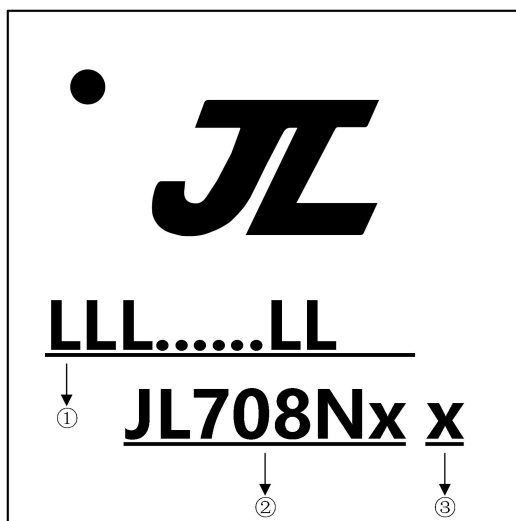


Figure 5-1 JL7083F Package Outline

- ① LLL.....LL: LOT No. , It contains 7 to 18 alphanumerics
- ② JL708Nx : Chip Model
- ③ x : Built-in flash size
 - 0 : No Flash Memory
 - 2 : 2Mbit Flash
 - 4 : 4Mbit Flash
 - 8 : 8Mbit Flash
 - 6 : 16Mbit Flash
 - 3 : 32Mbit Flash

6 Solder-Reflow Condition

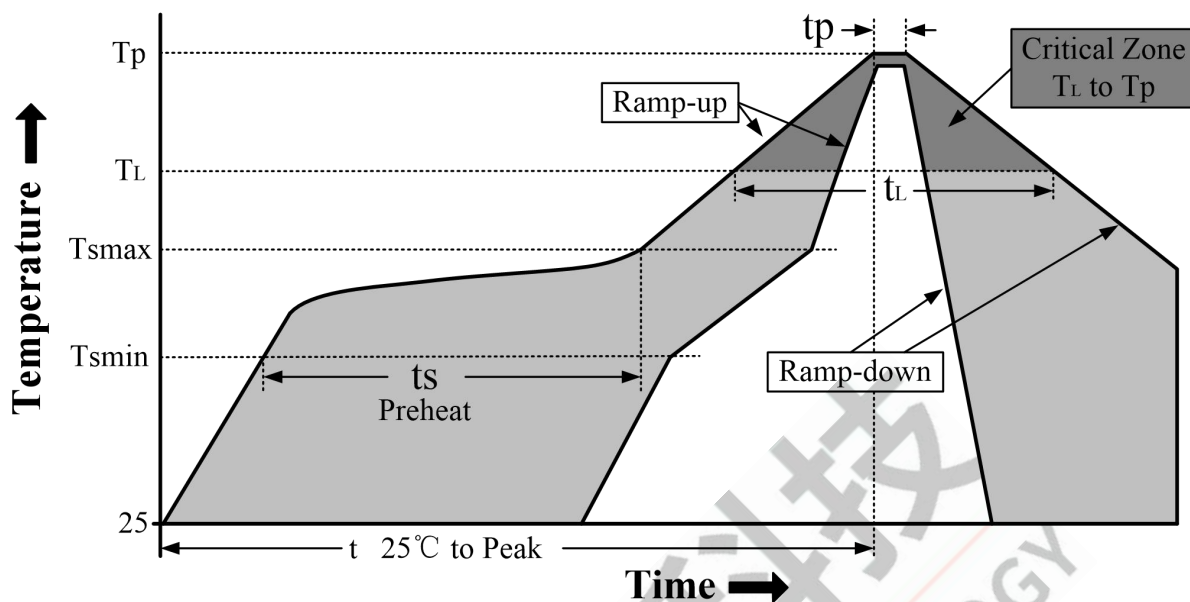


Figure 6-1 Classification Reflow Profile

Table 6-1 Classification Profiles

Profile Feature		Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat/Soak	Temperature Min (T_{smin})	100°C	150°C
	Temperature Max (T_{smax})	150°C	200°C
	Time (t_s) from (T_{smin} to T_{smax})	60-120 seconds	60-180 seconds
Average ramp-up rate (T_{smax} to T_p)		3°C/second max	3°C/second max
Liquidous temperature (T_L)		183°C	217°C
Time (t_L) maintained above T_L		60-150 seconds	60-150 seconds
Peak package body temperature (T_p)		See Table 6-2	See Table 6-3
Time within 5°C of actual Peak Temperature (t_p) ²		10-30 seconds	20-40 seconds
Ramp-down rate (T_p to T_L)		6°C/second max	6°C/second max
Time 25°C to peak temperature		6 minutes max	8 minutes max

Note

- 1.All temperatures refer to topside of the package, measured on the package body surface
- 2.Time within 5°C of actual peak temperature (t_p) specified for the reflow profiles is a "supplier" and "user" maximum.

Table 6-2 SnPb Classification Temperature

Package Thickness	Volume mm ³ < 350	Volume mm ³ ≥ 350
<2.5 mm	240 +0/-5°C	225 +0/-5°C
≥2.5 mm	225 +0/-5°C	225 +0/-5°C

Table 6-3 Pb-free - Classification Temperature

Package Thickness	Volume mm ³ < 350	Volume mm ³ 350 - 2000	Volume mm ³ > 2000
< 1.6mm	260°C	260°C	260°C
1.6 mm - 2.5mm	260°C	250°C	245°C
> 2.5mm	250°C	245°C	245°C

Note

1.*Tolerance The device manufacturer/supplier shall assure process compatibility up to and including the stated classification temperature (this means Peak reflow temperature +0°C.For example 260°C+0°C)at the rated MSL level.